

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
15 November 2001 (15.11.2001)

PCT

(10) International Publication Number  
WO 01/85318 A2

- (51) International Patent Classification<sup>7</sup>: B01F 3/04, (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/CA01/00668
- (22) International Filing Date: 11 May 2001 (11.05.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/203,925 12 May 2000 (12.05.2000) US
- (71) Applicants and  
(72) Inventors: BUREAUX, John [CA/CA]; 594 Pocono Crescent, Orleans, Ontario K4A 3J6 (CA). SABOURIN, Roger [CA/CA]; 374 Amberlee Court, Newmarket, Ontario L3X 1E7 (CA).
- (74) Agent: SEABY, George, A.; Seaby & Associates, 603 - 880 Wellington Street, Ottawa, Ontario K1R 6K7 (CA).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR PRODUCING FOAM

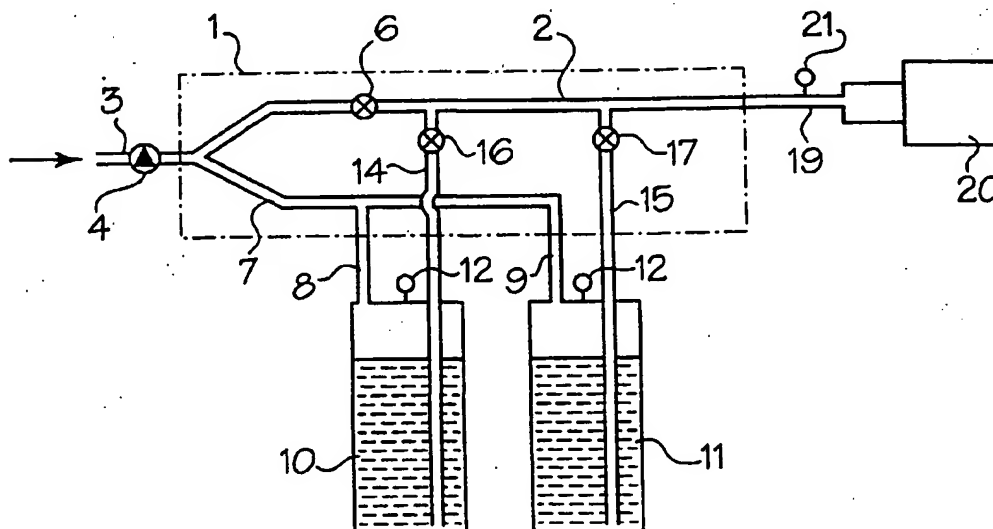

(57) Abstract: Foam carrying a decontaminating/oxidizing agent is produced by introducing air under pressure into a pair of tanks (10, 11) carrying a foam forming solution and a solution of the agent. The tanks (10, 11) are connected to an air passage (2) through a manifold (1) for introducing the foam solution and then the agent solution into the air passage (2) to produce foam bubbles coated with agent for discharge under pressure through a hose (19) connected to said air passage (2). Alternatively, the two solutions are mixed in a single tank (22) connected to a source of air (23) under pressure, and the resulting mixture is discharged through a hose (37) and a foam-forming nozzle (40) at the discharge end of the hose (37).

Applicants: Donald W. Landry and Shi-Xian Deng  
U.S. Serial No.: Not Yet Known (national stage of  
PCT International Application No.  
PCT/US2003/039207)  
Filed: Herewith  
Exhibit 8

WO 01/85318 A2